
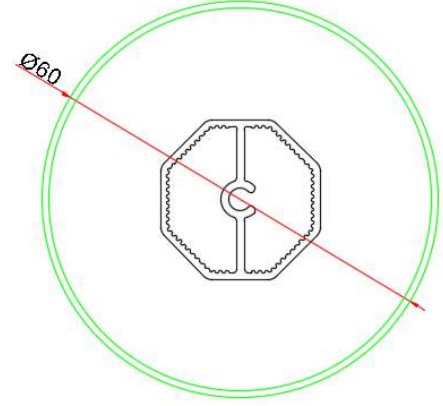


CYLINDER - Item Code PLD008

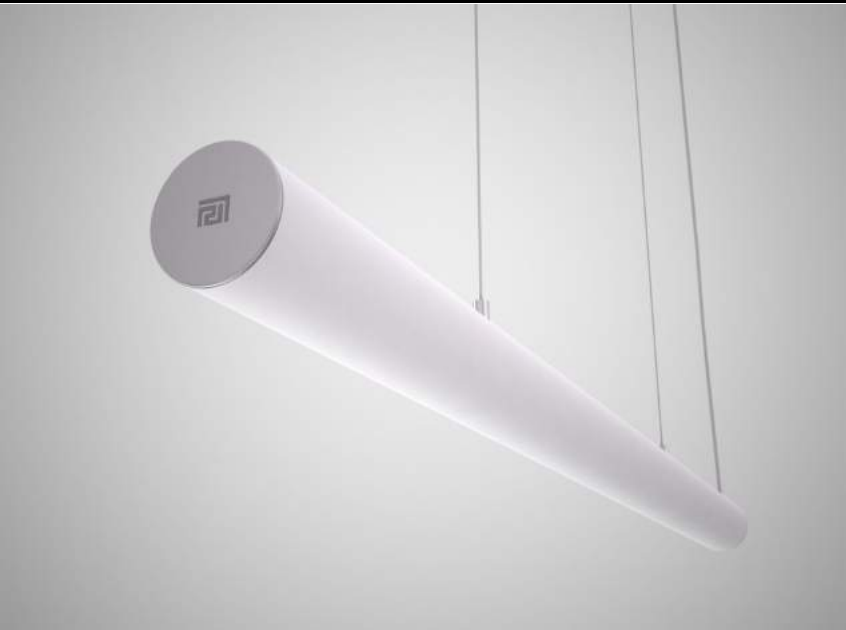

Product Specifications

General Information

| | |
|--------------------------|--------------------|
| Product Code | PLD008 |
| Body | Extruded Aluminium |
| Number of light source | 8 |
| Light source color | 2700K -> 6000K |
| Cap-Base | 6cm |
| Light source replaceable | Yes |
| Luminaire light beam | 360° |

| | |
|-------------------|------------|
| Suspension System | 2 wire set |
| Protection | IP40 |
| Space | Indoor |
| Mounting | Suspended |
| Trimless | N/A |
| Warranty Period | 2 years |

Physical Specifications

| | |
|-------------------|---------------------------|
| Structure | Extruded Aluminium |
| Reflector | N/A |
| Optical Cover | Polycarbonate Opal |
| Fixation material | Aluminium/Stainless Steel |
| Length | On Request |
| Height | 60mm |
| Width | 60mm |

| | |
|---------------|-----------------------|
| Finish | Natural Aluminium/RAL |
| Weight | - |
| Body | Extruded Aluminium |
| Diffuser | Polycarbonate Opal |
| UV Protection | Yes |

CYLINDER - Item Code PLD008

Electrical Specifications

| | |
|----------------------|-------------|
| Input Voltage | 220 - 240 V |
| Input Frequency | 50 - 60 hz |
| Dimmable | On request |
| Output | 12 - 24V |
| Factor of protection | IP20-IP67 |
| Power Factor | - |
| Power | - |

Performance

| | |
|-------------------------|-----------------|
| Power | 32W-64W/m |
| Luminous Flux | 3520lm-7040lm/m |
| Luminous flux tolerance | 10% |
| Colour Temperature | 2700K -> 6000K |
| Colour Rendering Index | ≥80 |
| LED Luminaire Efficacy | 110lm / W |

Lamp Specifications

| | |
|--------------------|-----------------|
| Lamp Type | LED |
| LED Chip | SAMSUNG |
| Luminous Flux | 440lm-880lm / m |
| Power | 4W-8W/m |
| Colour Temperature | 2700K -> 6000K |
| Length | 3cm -> 50cm |
| Width | 0.8cm |

Options

| | |
|-----------------------|-----------------|
| Length | On request |
| Finish | RAL on request |
| Dimmable | Yes / No |
| Trimless | On request |
| Colour Temperature | 2700K -> 6000K |
| Power / Luminous Flux | 3520lm-7040lm/m |
| IP Rate | IP44 |

Remarks

| |
|-------------------|
| Customized length |
| Angular shapes |
| RGB version |